





SURFACE RECOMENDATION



Walls having divots, scratches, or bumps would require some pre-treatment before doing the Wepaint application. Use good quality of putty, laapi or joint compound to seal/repair this type of surface and repaint it if necessary.

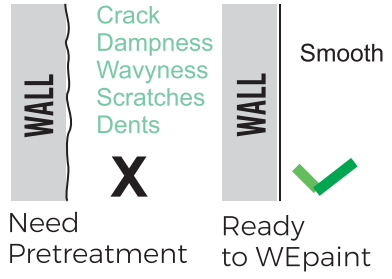

**WEPAIN
WHITE**



**WEPAIN
CLEAR**