


# STEP 01

- Ø WEpaint Clear is a top coat which can be apply over previously painted surface. Do not apply on bared wall or pre primed surface.
- Ø WEpaint clear works best on glosy, semiglosy, egg sell or satin type smooth finish.
- Ø For newly painted wall surface, wait for 7 days to ensure proper drying and hardening of paint before applying Wepaint.
- Ø Wipe the surface with a clean cloth to prevent debris and dust getting caught in the surface during application. If necessary then sand the surface with 2000 no. Sand paper to remove any divots.

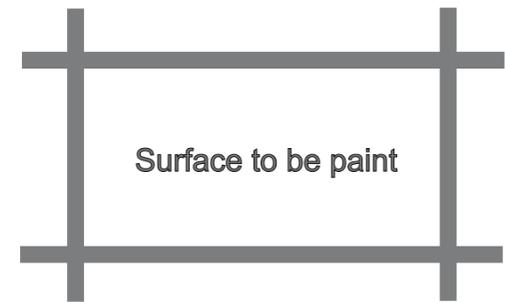

# STEP 02


Make the place dust free before opening the can.

Add part B in to part A.


Mix part A & B mixture thoroughly for 2-3 minutes with stirring stick

After mixing, you have 1 hr for application of paint


Pour mixture on to paint tray carefully



Add



Mix



Pour

# STEP 03


Ø As shown in above figure, divide wall in to four sections virtually. Saturate the roller properly.

Ø CLEAR is low viscosity paint; avoid applying too much pressure to the roller during application to minimize drips.

Ø Start on Upper-1(left top of the wall, MOTION-1) using up and down motion to paint that upper section.

Ø Once Upper-1 is complete, roll on to lower-1(MOTION-2) section same as previously mentioned.

Ø If found any roller marks, foam or non- painted surface then cover it by roller with light pressure.

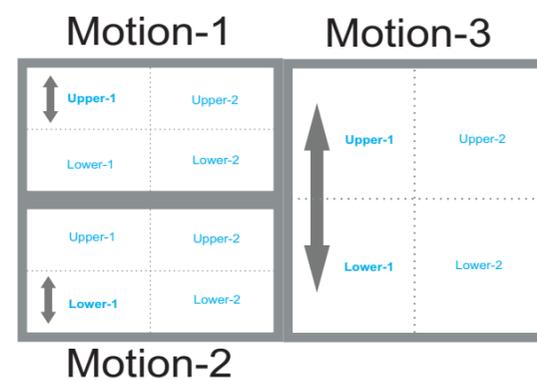


# STEP 04

Ø After that move to fresh Upper-2 section (MOTION-4).Follow up and down motion to cover the surface and then follow the same for Lower-2 section (MOTION-5).

Ø For larger-scale installations, replace the roller after every 40 sq. ft. of product applied.

Ø Frequently check the surface for foam, sagging, Non covering area. Cover it with lightly rolling with some material.

Ø WEpaint is quick drying formulation. DO NOT TOUCH THE WEPAINT-ED SURFACE AFTER 18-20 MINUTES. During this 20 minutes WEpaint-ed surface can be touch by roller, finger to remove/correct Foam, sagging or any other defects.

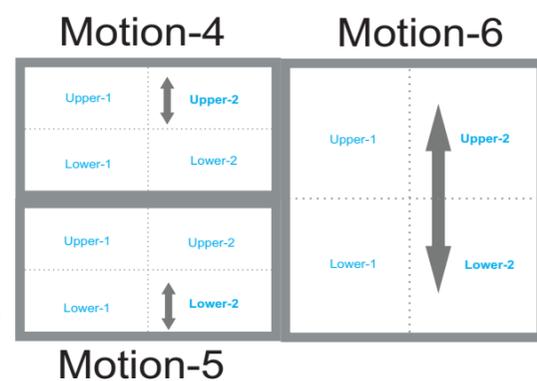

# STEP 05

Ø Once finished, carefully remove masking tape immediately when applied paint is wet without hampering painted surface and clean up the place.

Ø Collect all used container, stirr stick, masking tape, paint tray, cover sheet, roller and pack it in to WASTE COLLECTION BAG given in kit and disposed off.



# STEP 06

Ø WEpaint will dry in 2 to 3 hour.

Ø DO NOT WRITE for 2 days of post-application.

Ø After wait of 2 days, First check on corner of applied surface with marker pen for writability and erasability (because curing varies on temperature/humidity and so on region to region)

